

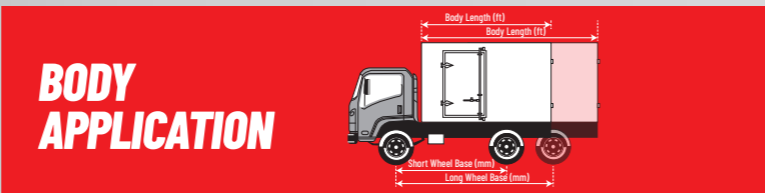


SPECIFICATIONS		NLR PRO		NLR 130	
MODEL CODE		NLR77UEE	NLR77UHE	NLR85UEE	NLR85UHE
Drive System		4 x 2			
ENGINE					
Model		4JH1-TC		4JJ1-TC	
Type		4-Cylinder In-line, 4-Cycle, Water-Cooled OHV, Turbo with Intercooler		4-Cylinder In-line, 4-Cycle, Water-Cooled DOHC, Turbo with Intercooler	
Displacement	cc	2,999		2,999	
Maximum Output (Gross)	kW (PS) @ rpm	81 (110) @ 3,200		96 (130) @ 2,800	
Maximum Torque	Nm (kgfm) @ rpm	230 (24) @ 1,400-3,400		330 (33.6) @ 1,600-2,600	
Emission Level		Euro 2			
Fuel System		Commonrail Direct Injection			
TRANSMISSION					
Model		MSB-5S		MYJ-5T	
Type		Manual 5-Speed			
	1st	5.016		5.315	
	2nd	2.672		3.053	
	3rd	1.585		1.655	
	4th	1.000		1.000	
	5th	0.770		0.721	
	Reverse	4.783		5.068	
	Final	5.857		4.555	
WEIGHT & CAPACITIES					
Gross Vehicle Weight	kg	4,800			
Curb Weight	kg	1,865	1,915	1,925	1,975
Front	kg	1,345	1,355	1,410	1,420
Rear	kg	520	560	515	555
Fuel Tank Capacity	l	75	100	75	100
AXLE					
Front	Type	Reverse Elliot, I-Beam			
Front Axle Capacity (Design)	kg	2,900			
Rear	Type	Banjo, Full Floating			
Rear Axle Capacity (Design)	kg	3,600			
SUSPENSION SYSTEM					
Suspension	Front	Semi Elliptical Alloy Steel Leaf Spring with Double Acting Telescopic Shock Absorber, Stabiliser Bar			
	Rear	Semi Elliptical Alloy Steel Leaf Spring with Double Acting Telescopic Shock Absorber			
TYRES & WHEELS					
Tyres		205 / 85R16			
Wheels		16 x 5.5J-85			
BRAKES					
Service		Drum Brakes with Dual Circuit Hydraulic Control, Vacuum Assistance and Load Sensing Proportioning Valve (LSPV)			
Parking Brake Type		Transmission Mounted, Mechanical Operated Internal Expanding Exhaust Brake			
STEERING					
Steering System		Power Assist, Recirculating Ball Type			
Min. Turning Radius	m	5.4	7.1	5.4	7.1
ELECTRICAL					
Battery		12V x 2			
Alternator		12V-60A		24V-90A	
DIMENSION					
Overall Length	mm	4,730	6,025	4,730	6,025
Overall Width	mm		1,815		1,815
Overall Height	mm	2,172	2,175	2,172	2,175
Wheelbase	mm	2,475	3,345	2,475	3,345
Front Overhang	mm		1,110		1,110
Rear Overhang	mm	1,145	1,570	1,145	1,570
Front Tread	mm		1,475		1,475
Rear Tread	mm		1,395		1,395
Cab to Axle Center	mm	2,022	2,892	2,022	2,892

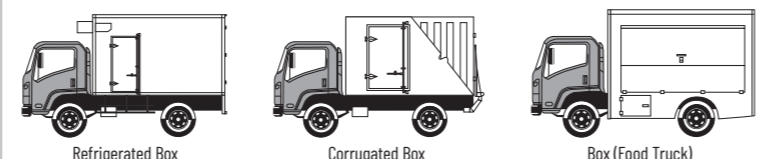


MODEL	Standard	ft	NLR PRO		NLR 130	
			NLR77UEE	NLR77UHE	NLR85UEE	NLR85UHE
			10	14	10	14

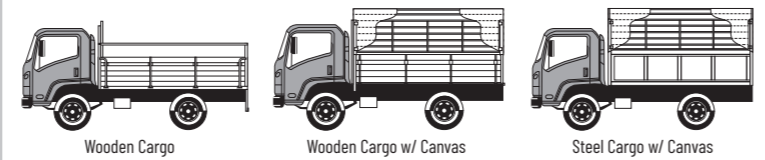

Recommended for NLR85UEE / UHE only

Refer to ISUZU authorised drawing plan for actual body length at ISUZU dealers. Pictures shown are for illustration purposes only.

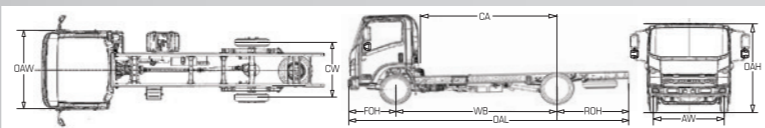

Isuzu Malaysia Sdn. Bhd. is engaged in an ongoing research and development programme, and reserves the right to change specifications, resulting in advancements or technical refinements, without prior notice. All product specifications are within normal manufacturing allowances and tolerances.

Dealer's information
Authorised Isuzu Dealer
AUTOEXEC CORPORATION SDN BHD (587776-U)
 Lot 256, No. 3-2, Jalan Semarak, 54100 Kuala Lumpur
 Sales Enquiry: 03 - 2691 2233
 f IsuzuJlnSemarak

ISUZU

ELF



4 WHEELER
 GVW 4,800kg

NLR PRO

NLR 130



FACTORY FITTED LONG WHEELBASE



ISUZU
 ISUZU MALAYSIA SDN BHD 200401026438 (664946-H)
 501D, LEVEL 5, TOWER D, UPTOWN 5, NO.5, JALAN SS21/39,
 DAMANSARA UPTOWN, 47400 PETALING JAYA, SELANGOR DARUL EHSAN.
 GENERAL LINE: 03-7723 9777 FAX: 03-7723 9779
 HOTLINE: 1-300-88-1133 www.isuzu.net.my
 f IsuzuTrucksMalaysia

ISUZU SERVICE CENTRE SDN BHD 201601034731 (1205672-X)
 LOT 730, JALAN SG.RASA, SECTION 17,
 40000 SHAH ALAM, SELANGOR DARUL EHSAN.
 PHONE: 03-5513 0518
 FAX: 03-5512 7550




Ver.01/November2019/PHOCVD.JL

POWERTRAIN




NLR PRO 4JH1-TC

Displacement: **2,999cc**
 Max. Output (Gross): **110ps (81kW) @ 3,200rpm**
 Max. Torque: **230Nm @ 1,400 - 3,200rpm**

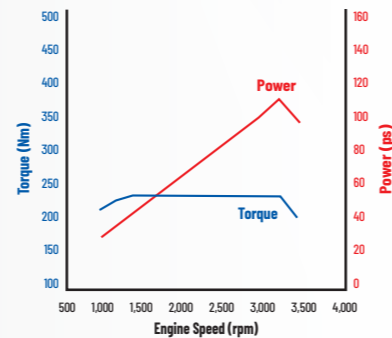

NLR 130 4JJ1-TC

Displacement: **2,999cc**
 Max. Output (Gross): **130ps (96kW) @ 2,800rpm**
 Max. Torque: **330Nm @ 1,600 - 2,600rpm**

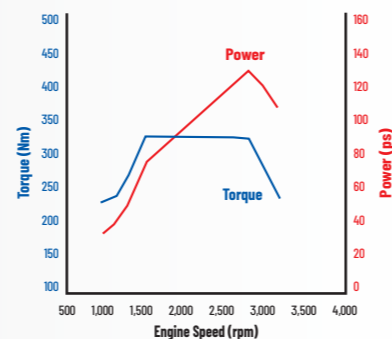


INTERIOR



Best-in-class spacious and quiet cabin with ergonomically designed and placed interior panels positioned for improved visibility makes driving more comfortable with ample room for 3 adults.



Wide-angle mirror offers extra visibility of surroundings and minimising blind-spots.



Excellent all-round visibility.

FOR SAFETY, COST-SAVINGS AND THE ENVIRONMENT


USEFUL FEATURES

FACTORY FITTED LONG WHEELBASE



3,345mm


Maximise cargo carrying capacity with different wheelbase and rear body application to suit a variety of business!




SWB and a narrow cabin ensures efficient driving maneuverability in tight places with cargo easier!



Halogen reflectors provide outstanding illumination over a broad area to improve night time visibility and safety.

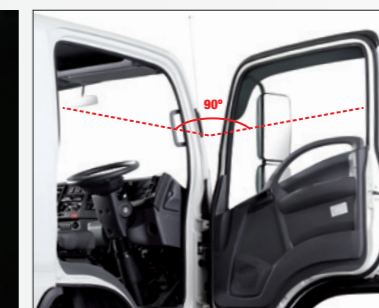

90 Degrees door opening.

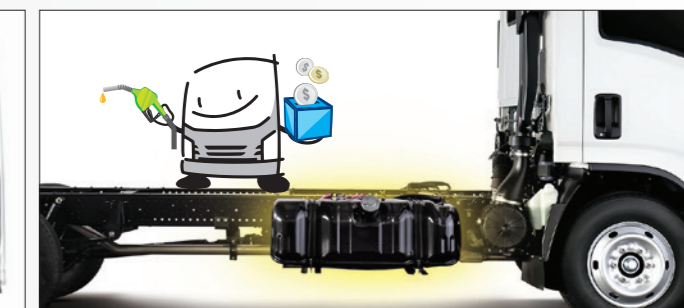

*100 litres fuel tank ensures greater range for deliveries and minimise time refuelling.



Headlight leveling. Preferred headlight beam position can be maintained when truck is loaded and when it has no load.



Excellent Ingress and Egress even in tight door opening condition.



**90 amperes alternator provides high voltage for high consumption electrical application.



Energy absorbing steering wheel.

*Applicable for NLR77UHE & NLR85UHE only. **Applicable for NLR85UEE & NLR85UHE only.